



XHRL Series

XHRL12360WG Datasheet

12V Top Terminal VRLA-AGM

Specifications

Voltage (Vdc)	12
Nominal Capacity (10.02V per PCS @ 25°C)	360W @ 15min-rate
Watts Per Cell (30-Sec 1.67 VPC @ 25°C)	--
Watts Per Cell (5-Min 1.67 VPC @ 25°)	667.17
Watts Per Cell (15-Min 1.67 VPC @ 25°)	372.78
Max Charge Current (A)	36.00
Max Discharge Current (A)	800 (5sec)
Short Circuit Current (A)	2551
Internal Resistance	Approx. 3.10 mΩ
Terminal Type	I2 thread lead alloy terminal to accept M6 bolt
Terminal Torque	51.7±10.3 Kgf·cm / 44.9±9.0 Lbf·in / 5.1±1.0 N·m
Container Material	PP (UL 94-HB) & Flame Retardant (94-V0) available upon request
Weight (kg. / lb., Approx.)	28.30 / 62.37
Length (L) (mm / in)	277.0±2.5 / 10.91±0.10
Width (W) (mm / in)	168.5±2.0 / 6.63±0.08
Height (H) (mm / in)	213.5±2.5 / 8.41±0.10
Design Life	Up to 10 Years in Standby Service at 25°C Eurobat (20°C): 12+ Years Very Long Life
Operating Temperature	Nominal: 25°C (77°F) Discharge: -15°C - 50°C (5°F-122°F) Charge/Storage: -15°C - 40°C (5°F - 104°F)
Float Charging Voltage	13.5 - 13.8 Vdc/battery 25°C (77°F)
Eq. Charging Voltage	14.4 - 15.0 Vdc/battery 25°C (77°F)
Self-Discharge	Less than 10% after 90 days, can be stored up to 6 months and 10 months with equalization charge* at 25C (77F); Full recharging is required before usage, and charged sooner if stored at higher temperature than 25C (77F).



Valve Regulated Lead Acid (VRLA) Battery

Maintenance-Free, Absorbent Glass Mat (AGM) Technology for Efficient Gas Recombination of up to 99%

Pure Lead Construction and Proprietary Elements

Designed for High-Rate UPS, Float Service Standby Power Applications

Built in Accordance with IEC 60896-21/22:2004 and UL1989 Recognized (MH14533)





XHRL Series

XHRL12360WG Datasheet


12V Top Terminal VRLA-AGM

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)




F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
10.02V (1.67 VPC)	524	421	386	360	308	272	200	159	116	82.8	65.2	46.6
10.50V (1.75 VPC)	438	364	334	310	275	240	185	150	111	80.3	63.7	45.9
10.80V (1.80 VPC)	366	316	295	278	243	215	170	140	106	77.1	61.5	44.7

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
10.02V (1.67 VPC)	5399	4381	4003	3701	3270	2864	2236	1799	1324	957	760	550
10.50V (1.75 VPC)	4586	3834	3562	3355	2943	2617	2097	1708	1280	933	746	544
10.80V (1.80 VPC)	4067	3454	3277	3047	2671	2411	1936	1601	1225	900	723	531

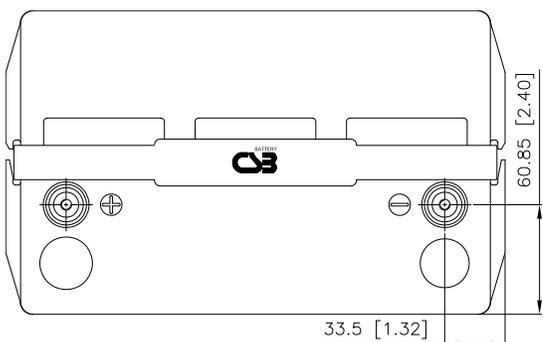

Detail A Drawing(4:1)

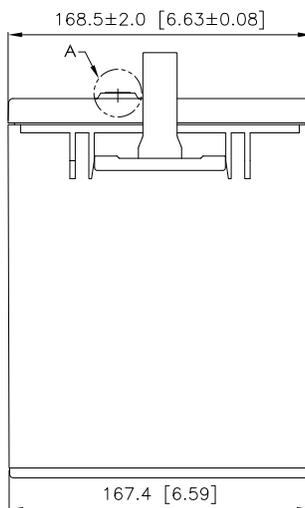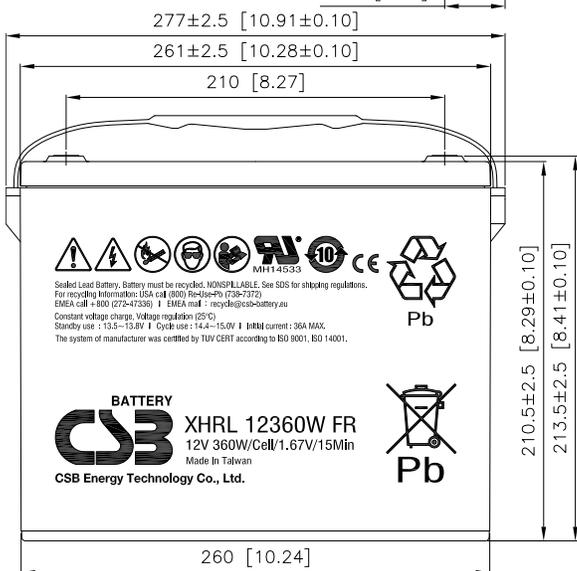

Sealed Lead Battery. Battery must be recycled. NONSPILLABLE. See SDS for shipping regulations.
 For recycling information: USA call (800) Rec-Use-Pb (738-7372)
 SMS call +800 (272-7338) | EMS call +800 (272-7338) | EMS mail: recycling@csb-battery.tw
 Constant voltage charge, Voltage regulation (25°C)
 Standby use: 13.5-13.8V | Cycle use: 14.4-15.0V | I_{HRM} current: 36A MAX.
 The system of manufacturer was certified by TUV CERT according to ISO 9001, ISO 14001.

BATTERY
CSB XHRL 12360W FR
 12V 360W/Cell/1.67V/15Min
 Made in Taiwan
 CSB Energy Technology Co., Ltd.

