



# GPL Series

## GPL12880 Datasheet

12V Top Terminal VRLA-AGM

### Specifications

Voltage (Vdc)	12
Ah Capacity (8-Hr 1.75 VPC @ 25°C)	88.00
Ah Capacity (20-Hr 1.75 VPC @ 25°C)	94.80
Ah Capacity (8-Hr 1.80 VPC @ 25°C)	86.4
Max Charge Current (A)	26.40
Max Discharge Current (A)	800 (5sec)
Short Circuit Current (A)	2098
Internal Resistance	Approx. 3.6 mΩ
Terminal Type	I2 thread lead alloy terminal to accept M6 bolt
Terminal Torque	51.7±10.3 Kgf·cm / 44.9±9.0 Lbf·in / 5.10±1.0 N·m
Container Material	PP (UL 94-HB) & Flame Retardant (94-V0) available upon request
Weight (kg. / lb., Approx.)	29.70 / 65.46
Length (L) (mm / in)	308.7±2.5 / 12.15±0.10
Width (W) (mm / in)	169.0±2.0 / 6.65±0.08
Height (H) (mm / in)	213.6±2.5 / 8.41±0.10
Design Life	Up to 10 Years in Standby Service at 25°C. Eurobat (20°C): >12 Years Very Long Life
Operating Temperature	Nominal: 25°C (77°F) Discharge: -15°C - 50°C (5°F-122°F) Charge/Storage: -15°C - 40°C (5°F - 104°F)
Float Charging Voltage	13.5 - 13.8 Vdc/battery 25°C (77°F)
Eq. Charging Voltage	14.4 - 15.0 Vdc/battery 25°C (77°F)
Self-Discharge	Less than 10% after 90 days, can be stored up to 6 months and 10 months with equalization charge* at 25C (77F); Full recharging is required before usage, and charged sooner if stored at higher temperature than 25C (77F).



Valve Regulated Lead Acid  
(VRLA) Battery

Maintenance-Free, Absorbent  
Glass Mat (AGM) Technology for  
Efficient Gas Recombination of  
up to 99%

Pure Lead Construction and  
Proprietary Elements

Designed for Float Service  
Standby Power Applications

Built in Accordance with IEC  
60896-21/22:2004, UL1973  
Listed (MH66728) and UL1989  
Recognized (MH14533)

Certified by TUV NORD  
according to ISO 9001:2015





# GPL Series

## GPL12880 Datasheet


12V Top Terminal VRLA-AGM

### Constant Current Discharge Characteristics Per Battery: Amperes (25°C, 77°F)


F.V/Time	5MIN	10MIN	15MIN	30MIN	60MIN	90MIN	2HR	3HR	5HR	8HR	10HR	20HR
10.02V (1.67 VPC)	321	225	171	102	62.4	45.2	36.0	25.5	16.9	11.2	9.12	4.84
10.50V (1.75 VPC)	274	199	163	99.0	60.3	43.9	35.1	25.1	16.6	11.0	8.96	4.74
10.80V (1.80 VPC)	246	186	154	96.1	58.8	43.1	34.6	24.6	16.2	10.8	8.85	4.66

### Constant Power Discharge Characteristics Per Battery: Watts (25°C, 77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	60MIN	90MIN	2HR	3HR	5HR	8HR	10HR	20HR
10.02V (1.67 VPC)	3307	2417	1919	1169	719	531	428	305	202	135	109	57.9
10.50V (1.75 VPC)	2995	2261	1828	1145	707	524	424	301	200	132	107	57.5
10.80V (1.80 VPC)	2782	2129	1734	1113	694	516	418	298	198	130	106	57.1

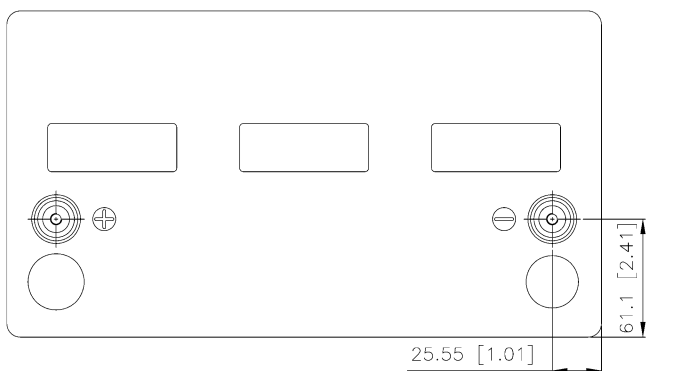

Detail A Drawing(4:1)

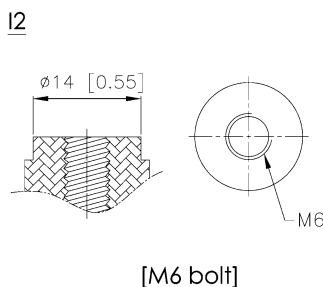

[M6 bolt]

