



HRL Series

HRL1280W Datasheet

12V Top Terminal VRLA-AGM

Specifications

Voltage (Vdc)	12
Watts Per Cell (30-Sec 1.67 VPC @ 25°C)	--
Watts Per Cell (5-Min 1.67 VPC @ 25°)	161.83
Watts Per Cell (15-Min 1.67 VPC @ 25°)	80.83
Max Charge Current (A)	8.0
Max Discharge Current (A)	300
Short Circuit Current (A)	723
Internal Resistance (mΩ)	Approx. 9.00
Terminal Type	I1 thread lead alloy terminal to accept M5 bolt
Terminal Torque	30.4±6.1 Kgf·cm / 26.4±5.3 Lbf·in / 3.0±0.6 N·m
Container Material	ABS (UL 94-HB) & Flame Retardant (94-V0) available upon request
Weight (kg. / lb., Approx.)	6.60 / 14.55
Length (L) (mm / in)	181.0±2.0 / 7.13±0.08
Width (W) (mm / in)	76.0±1.0 / 2.99±0.04
Height (H) (mm / in)	165.0±2.0 / 6.50±0.08
Design Life	Up to 8 Years in Standby Service at 25°C. Eurobat (20°C): 10-12 Years Standard Commercial
Operating Temperature	Nominal: 25°C (77°F) Discharge: -15°C - 50°C (5°F-122°F) Charge/Storage: -15°C - 40°C (5°F - 104°F)
Float Charging Voltage	13.5 - 13.8 Vdc/battery 25°C (77°F)
Eq. Charging Voltage	14.4 - 15.0 Vdc/battery 25°C (77°F)
Self-Discharge	Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F); Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).



Valve Regulated Lead Acid (VRLA) Battery

Maintenance-Free, Absorbent Glass Mat (AGM) Technology for Efficient Gas Recombination of up to 99%

Pure Lead Construction and Proprietary Elements

Designed for High-Rate UPS, Float Service Standby Power Applications

Built in Accordance with IEC 61056-1/2:2012, UL1973 Listed (MH66728) and UL1989 Recognized (MH14533)

Certified by TUV NORD according to ISO 9001:2015





HRL Series

HRL1280W Datasheet

12V Top Terminal VRLA-AGM



Constant Current Discharge Characteristics Per Battery: Amperes (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
10.02V (1.67 VPC)	142	103	90.7	81.7	69.5	58.7	43.5	34.0	24.6	18.0	14.4	10.4
10.50V (1.75 VPC)	119	92.3	82.6	75.5	64.3	54.3	41.6	32.9	23.7	17.4	14.0	10.1
10.80V (1.80 VPC)	105	83.2	75.7	70.0	60.8	51.8	39.8	32.1	23.0	16.9	13.6	10.0

Constant Power Discharge Characteristics Per Battery: Watts (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
10.02V (1.67 VPC)	1431	1073	971	895	761	661	485	382	280	207	167	121
10.50V (1.75 VPC)	1270	983	897	832	708	626	468	370	270	200	161	117
10.80V (1.80 VPC)	1173	909	836	781	679	593	453	364	266	197	159	116

Detail A Drawing(3:1)

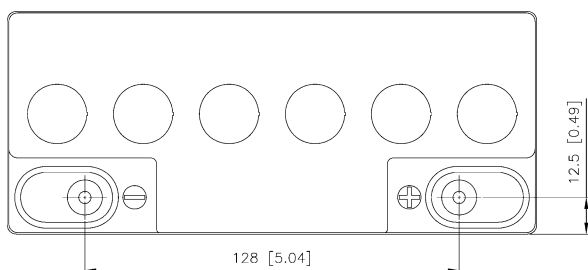

[M5 bolt & nut]

