



# XHRL Series

## XHRL12410WG Datasheet

12V Top Terminal VRLA-AGM

### Specifications

Voltage (Vdc)	12
Watts Per Cell (30-Sec 1.67 VPC @ 25°C)	--
Watts Per Cell (5-Min 1.67 VPC @ 25°)	729.83
Watts Per Cell (15-Min 1.67 VPC @ 25°)	417.33
Max Charge Current (A)	41.00
Max Discharge Current (A)	800 (5sec)
Short Circuit Current (A)	3171
Internal Resistance	Approx. 2.90 mΩ
Terminal Type	I2 thread lead alloy terminal to accept M6 bolt
Terminal Torque	51.7±10.3 Kgf·cm / 44.9±9.0 Lbf·in / 5.1±1.0 N·m
Container Material	PP (UL 94-HB) & Flame Retardant (94-V0) available upon request
Weight (kg. / lb., Approx.)	32.60 / 71.85
Length (L) (mm / in)	324.7±2.5 / 12.78±0.10
Width (W) (mm / in)	169.0±2.0 / 6.65±0.08
Height (H) (mm / in)	213.6±2.5 / 8.41±0.10
Design Life	Up to 10 Years in Standby Service at 25°C. Eurobat (20°C): >12 Years Very Long Life
Operating Temperature	Nominal: 25°C (77°F) Discharge: -15°C - 50°C (5°F-122°F) Charge/Storage: -15°C - 40°C (5°F - 104°F)
Float Charging Voltage	13.5 - 13.8 Vdc/battery 25°C (77°F)
Eq. Charging Voltage	14.4 - 15.0 Vdc/battery 25°C (77°F)
Self-Discharge	Less than 10% after 90 days, can be stored up to 6 months and 10 months with equalization charge* at 25C (77F); Full recharging is required before usage, and charged sooner if stored at higher temperature than 25C (77F).



Valve Regulated Lead Acid (VRLA) Battery

Maintenance-Free, Absorbent Glass Mat (AGM) Technology for Efficient Gas Recombination of up to 99%

Pure Lead Construction and Proprietary Elements

Designed for High-Rate UPS, Float Service Standby Power Applications

Built in Accordance with IEC 60896-21/22:2004, UL1973 Listed (MH66728) and UL1989 Recognized (MH14533)

Certified by TUV NORD according to ISO 9001:2015





# XHRL Series

## XHRL12410WG Datasheet


12V Top Terminal VRLA-AGM

### Constant Current Discharge Characteristics Per Battery: Amperes (25°C, 77°F)


F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
10.02V (1.67 VPC)	552	463	427	399	341	302	229	183	133	95.7	75.6	54.2
10.50V (1.75 VPC)	469	402	370	343	304	269	212	171	128	92.5	73.6	53.3
10.80V (1.80 VPC)	402	349	326	309	272	242	195	160	121	88.3	70.8	51.9

### Constant Power Discharge Characteristics Per Battery: Watts (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
10.02V (1.67 VPC)	5600	4794	4379	4058	3599	3166	2504	2068	1580	1124	883	628
10.50V (1.75 VPC)	4887	4179	3899	3684	3242	2901	2362	1972	1529	1095	865	620
10.80V (1.80 VPC)	4307	3763	3603	3348	2958	2687	2207	1863	1468	1058	839	605

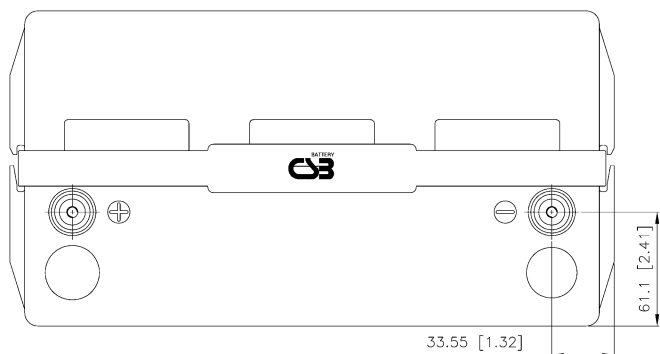

Detail A Drawing(4:1)

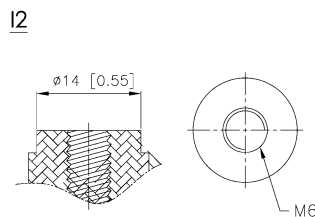

[M6 bolt]

