



Calor XHT-FT Series

XHT9000FT Datasheet

12V Front Terminal VRLA-AGM

Specifications

Voltage (Vdc)	12V
Watts Per Cell (30-Sec to 1.67VPC @25°C)	2069.83
Watts Per Cell (5-Min to 1.67VPC @25°C)	1403.33
Watts Per Cell (15-Min to 1.67VPC @25°C)	907.67
Max Charge Current (A)	75.00 (5 sec)
Max Discharge Current (A)	1900 (5 sec)
Short Circuit Current (A)	5102 (5 sec)
Internal Resistance (mΩ)	Approx. 1.86 mΩ
Terminal Type	I2 thread alloy terminal to accept M6 bolt
Terminal Torque	51.7±10.3 kgf·cm / 44.9±9.0 lbf·in 5.1±1.0 N·m
Container Material	Flame-Retardant Polymer Material (UL 94-V0)
Weight (kg. / lb.)	Approx. 71.1kg / 156.74lb
Length (L) (mm / in)	558.0 ± 2.5mm / 21.97 ± 0.10in
Width (W) (mm / in)	126.0 ± 1.5mm / 4.96 ± 0.06in
Height (H) (mm / in)	323.0 ± 2.5mm / 12.72 ± 0.10in
Design Life	12+ Years in Standby Service at 25°C; Up to 10 Years in Standby Service at 35°C
Operating Temperature	Nominal: 25°C (77°F) Discharge: -40°C - 65°C (-40°F - 149°F) Charge / Storage -40°C - 65°C (-40°F - 149°F)
Float Charging Voltage	13.5 - 13.8VDC / battery @ 25°C (77°F)
Eq. Charging Voltage	14.4 - 15.0VDC / battery @ 25°C (77°F)
Self-Discharge	Less than 10% after 90 days, can be stored up to 6 months & 10 months with equalization charge @ 25°C (77°F). Full recharge required before use. Charge sooner if stored above 25°C (77°F).



KEY FEATURES

- Valve Regulated Lead Acid (VRLA) Battery Constructed with High Durability Material (UL 94-V0)
- Maintenance-Free, Absorbent Glass Mat (AGM) Technology for Efficient Gas Recombination of up to 99%
- Pure Lead Construction and Catalyst 2X Proprietary Additive Technology

APPLICATIONS

- Designed for High-Rate & High-Temperature Standby Service
- Optimized for Harsh Environments with Extended Service Life

SAFETY & COMPLIANCE

- Built in Accordance with IEC 60896-21/22:2004
- UL1973 Listed (MH66728)
- UL1989 Recognized (MH14533)
- Certified by TUV NORD according to ISO 9001:2015



© 2026 CSB Energy Technology Co., Ltd. All Rights Reserved.

CSB Energy Technology Co., Ltd. reserves the right to change specifications or design without notice. Visit csb-battery.com for the latest information.



Calor XHT-FT Series

XHT9000FT Datasheet

12V Front Terminal VRLA-AGM


Constant Current Discharge Characteristics Per Battery: Amperes (25°C / 77°F)

F.V/Time	30SEC	60SEC	2MIN	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
10.02V (1.67VPC)	1221	1128	1041	842	698	635	506	407	291	208	160	112
10.50V (1.75VPC)	887	862	838	710	622	558	458	371	273	200	156	110
10.80V (1.80VPC)	770	742	715	626	546	498	420	337	254	189	149	106

Constant Power Discharge Characteristics Per Battery: Watts (25°C / 77°F)

F.V/Time	30SEC	60SEC	2MIN	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
10.02V (1.67VPC)	12419	11562	10445	8420	7376	6629	5446	4488	3285	2399	1896	1361
10.50V (1.75VPC)	10237	9946	8950	7634	6603	5992	5007	4094	3094	2316	1842	1334
10.80V (1.80VPC)	8210	7928	7655	7148	6008	5546	4664	3748	2909	2207	1769	1295

Line Drawing

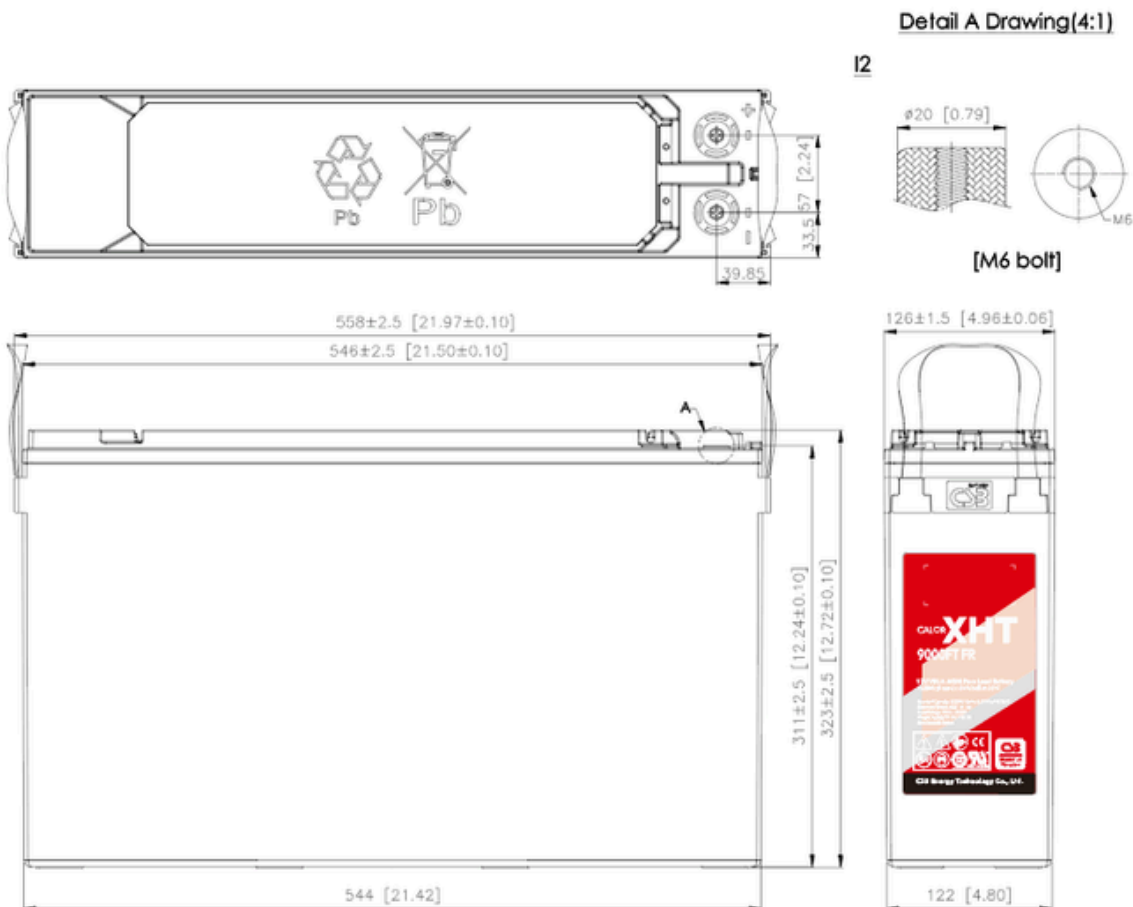

© 2026 CSB Energy Technology Co., Ltd. All Rights Reserved.

CSB Energy Technology Co., Ltd. reserves the right to change specifications or design without notice. Visit csb-battery.com for the latest information.